

2"x4" PRESSURE TREATED WOOD.
 LENGTH AS REQUIRED.
 SET PLUMB AND BACKFILL.
 PAINT PRESSURE TREATED WOOD BLUE.

MARKER POST SHALL BE PLACED
 IMMEDIATELY ADJACENT TO CURB STOP.


4' MIN.
 (CUT AT SUBGRADE
 IF UNDER ACP)

FINISHED GROUND

WOOD

42" MIN. TO
 48" MAX. BURY

MATCH SERVICE
 BOX DEPTH

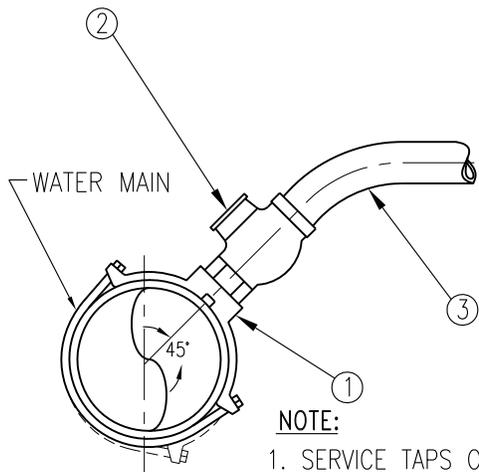

NOTE:

1. SERVICE TAPS ON PVC WATER MAIN SHALL BE SPACED A MINIMUM OF 36" IF TAPPED ON THE SAME SIDE AND 18" IF STAGGERED. TAP SHALL BE NO CLOSER THAN 24" FROM PIPE BELL.

MATERIAL LIST		
ITEM NO.	NO. REQ'D	DESCRIPTION
1	1	SERVICE SADDLE
2	1	CORPORATION STOP
3	1	1" "K-TYPE" COPPER TUBING—CONTINUOUS, NO JOINTS ALLOWED
4	1	CURB STOP
5	1	SERVICE BOX



1" STREET SERVICE ASSEMBLY

PUBLIC WORKS ENGINEERING	
APPR. BY: PKR	DATE: 09.13
DRAWN BY: LD	DWG: W1
CAD FILE: 2013_W1_09_2013	